Fourth International Meeting on Wind Turbine Noise

Rome Italy 12-14 April 2011

Measurement of Infrasound from Wind Farms and Other Sources

Turnbull CP, Turner JP
Sonus Pty Ltd
17 Ruthven Avenue, Adelaide, South Australia 5000
ct@sonus.com.au, jturner@sonus.com.au

Abstract

Infrasound is generated by a range of natural sources, including waves on the coastline, waterfalls and wind. It is also generated by a wide range of man-made sources such as industrial processes, vehicles, air conditioning and wind farms.

The measurement of infrasound at low levels requires a specific methodology, as it is readily affected by wind on the microphone. Such a methodology has been developed for this study to measure infrasound from two Australian wind farms.

The specific methodology is based on measurements being conducted below the ground surface in a test chamber that is approximately 500mm square and 500mm deep to reduce the influence that even light surface breezes can have on the infrasound results.

The below ground methodology has been tested and it has been confirmed that levels of infrasound above the ground and within the chamber are the same in the absence of surface winds when measuring a known and constant source of infrasound.

Infrasound was measured using the below ground methodology at two Australian wind farms, Clements Gap in the mid-north of South Australia and Cape Bridgewater in the coastal region of south-western Victoria. Infrasound was also measured in the vicinity of a beach, a coastal cliff, the city of Adelaide and a power station using the below ground methodology. The measured levels of infrasound from the wind farms have been compared with the other natural and man-made noise sources and all measurements have been compared with recognised audibility thresholds.

Introduction

Infrasound is generally considered to be sound at frequencies less than 20 Hz and is often described as inaudible, However, sound below 20 Hz remains audible provided that the sound level is sufficiently high [1]. The thresholds of audibility for infrasound have been determined in a range of studies [2].

The G-weighting has been standardised to determine the human perception and annoyance due to noise that lies within the infrasound frequency range [3]. A common audibility threshold from the range of studies is an infrasound level of 85 dB(G) or greater. The audibility threshold limit of 85 dB(G) is consistent with other European standards and studies, including the UK Department for Environment, Food and Rural Affairs threshold developed in 2003 [2], the UK Department of Trade and Industry study [4], the German Standard DIN 45680 [5] and independent research conducted by Watanabe and Moeller [6].

The generation of infrasound was detected on early turbine designs, which incorporated the blades 'downwind' of the tower structure [7]. The mechanism for the generation was the blade passing through the wake caused by the presence of the tower.

Australian States presently assess the noise from wind farms under a range of Standards and Guidelines [8, 9, 10, 11, 12]. These Standards and Guidelines do not provide prescriptive requirements for infrasound from wind farms due to the absence of evidence that infrasound should be assessed.

Notwithstanding, there have been concerns raised by the community regarding infrasound levels from wind farms.

To further investigate infrasound in the vicinity of Australian wind farms, this study, which was commissioned by Pacific Hydro:

- Develops a methodology to measure infrasound that minimises the influence of wind on the microphone;
- Measures the levels of infrasound at a range of distances from two wind farms;
- Compares the results against recognised audibility thresholds; and
- Compares the results with infrasound measurements made of natural sources, such as beaches, and man-made sources, such as a power station and general activity within the city of Adelaide.

Measurement Technique

Equipment

All measurements were conducted with a SVANTEK 957 Type 1 NATA calibrated sound and vibration analyser. The SVANTEK 957 Type 1 meter has a measured frequency response to 0.5 Hz. A GRAS 40AZ ½" free field microphone with a frequency response of ±1dB to 1 Hz and ±2dB to 0.5 Hz was also used. The meter and microphone arrangement is therefore suitable for measurement of noise levels in the infrasound range to the level of accuracy required for the assessment.

Microphone Mounting Method

A microphone mounting method is provided in IEC 61400-11 [13]. The method was developed to minimise the influence of wind on the microphone for the measurement of noise in frequencies higher than those associated with infrasound. This is achieved by mounting the microphone at ground level on a reflecting surface and by protecting the microphone with two windshields constructed from open cell foam. The method was not developed specifically for the measurement of infrasound, and wind gusts can be clearly detected when measuring in the infrasound frequency range using the above method.

Therefore, this study has developed an alternative method to reduce the influence of wind on the microphone that would otherwise mask the infrasound from the turbine.

A below ground surface method was developed based on a similar methodology [14]. This method has been adapted for this study, and includes a dual windshield arrangement, with an open cell foam layer mounted over a test chamber and a 90mm diameter primary windshield used around the microphone.

The microphone mounting arrangement is depicted in Figure 1.

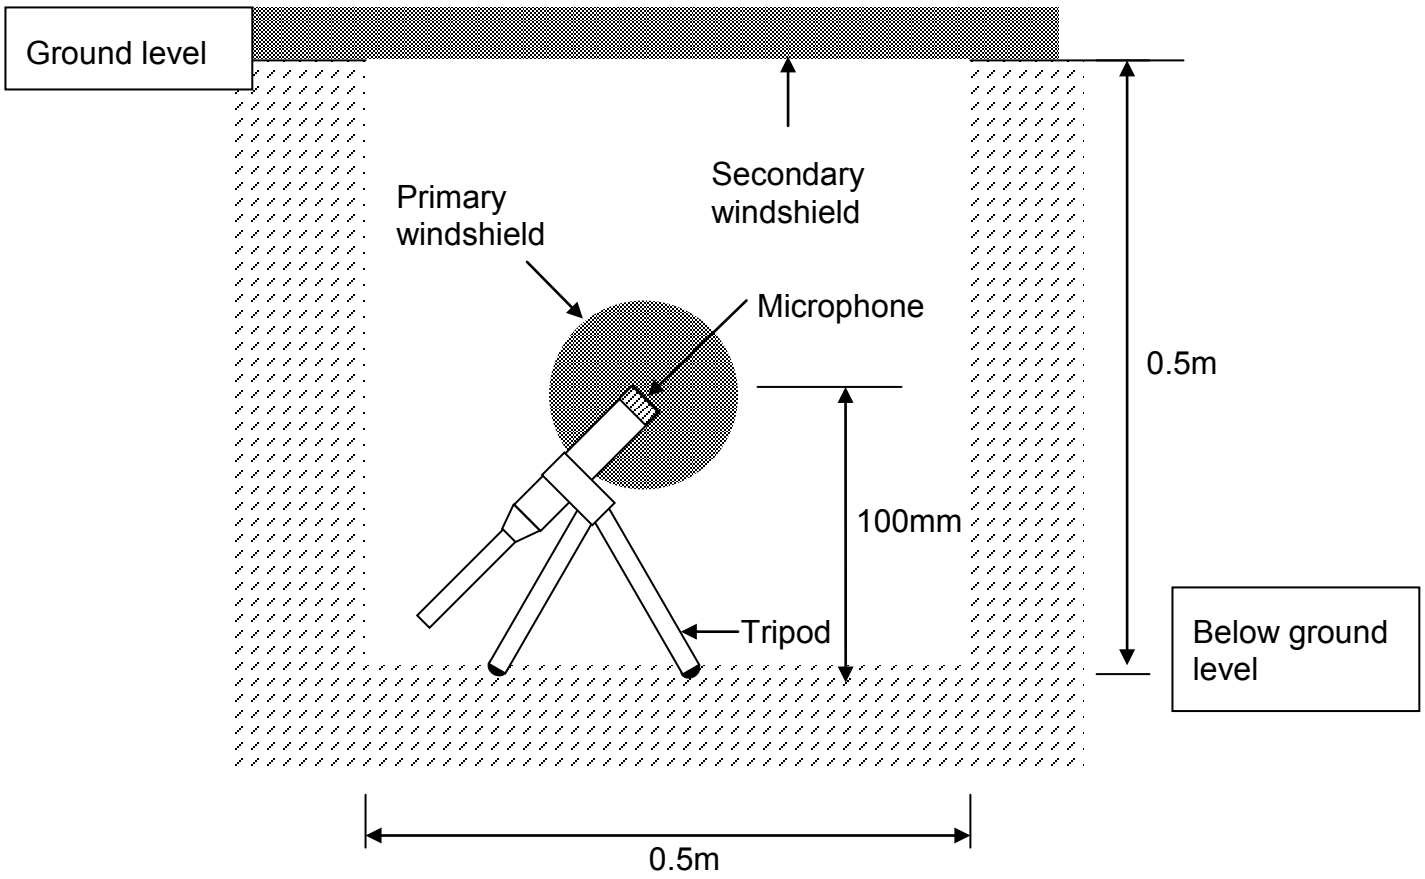

Figure 1 - Schematic of Microphone Position (not to scale)

Verification of Technique

The below ground technique was analysed at a remote site away from wind farms, transport corridors and other appreciable noise sources and in very still conditions.

The aim of the analysis was to determine the level of transfer of infrasound from outside to inside the chamber. The following procedure was used:

- A constant level of infrasound was generated using a tone signal generator and sub-woofer speaker (B&W Type ASW CDM), mounted 1m above the ground at a distance of 10m horizontally from the chamber. The infrasound was generated at a number of discrete frequencies between 8 and 20 Hz;
- The infrasound was measured using the IEC 61400-11 above ground technique;
- The infrasound was measured using the below ground technique;
- The infrasound was measured without the tone signal generator operating to determine the ambient level of infrasound.

The measurement results are summarised in Table 1.

Table 1 - Measurement approximately 10m from controlled source with no wind

Frequency (Hz)		8.00	10.0	12.5	16.0	20.0
Noise Level (dB)	Inside chamber	47	50	54	60	63
	Outside chamber	47	50	54	60	63
	Ambient Level	39	38	39	39	37

The measured levels inside and outside of the chamber were consistent at all of the frequencies produced by the signal generator. The table therefore confirms that the measurement of a constant source of infrasound in still conditions is the same above the ground as in the chamber using the technique described above. Therefore, the below ground technique is considered to be suitable to measure the infrasound from a source, whilst minimising the influence of wind on the microphone.

Results

Infrasound was measured at the Clements Gap Wind Farm in the mid-north of South Australia and Cape Bridgewater Wind Farm in the coastal region of south-western Victoria, using the verified below ground methodology. In addition, the level of infrasound was measured in the vicinity of a beach, a coastal cliff, a city and a power station.

At Clements Gap Wind Farm, the infrasound was measured at distances of 85m, 185m and 360m from the base of the turbine in a downwind direction. The testing was conducted between approximately 7pm and 11pm on Tuesday the 11th of May, 2010, under a clear night sky with a light breeze. Operational data indicates that the turbines were subject to hub height wind speeds of the order of 6 to 8m/s during the period of the testing.

At Cape Bridgewater Wind Farm, the infrasound was measured at distances of 100m and 200m from the base of the turbine in a downwind direction. The testing at the wind farm site was conducted between approximately 4am and 6am on Wednesday the 2nd of June, 2010, under a clear night sky with a light breeze. During the testing, the operational status of the turbines was constantly observed and confirmed. Measurements were conducted with the turbines operational and with the turbine blades stationary.

To determine the level of infrasound from natural sources, measurements were made in the vicinity of the Cape Bridgewater Wind Farm at 25m from the high waterline of a beach, at approximately 250m inland from a coastal cliff face and at 8km inland from the coast.

To determine the level of infrasound from other man-made noise sources, measurements were conducted at a distance of approximately 350m from a gas fired

power station as well as within the city of Adelaide at approximately 70m and 200m from two major roads.

The measured levels of infrasound are summarised in Table 2 and are shown graphically in one third octave bands in Figures 2, 3, 4 and 5.

Table 2 – Measured levels of infrasound

Frequency (Hz)	Measured Level (dB(G))
Clements Gap Wind Farm at 85m	72
Clements Gap Wind Farm at 185m	67
Clements Gap Wind Farm at 360m	61
Cape Bridgewater Wind Farm at 100m	66
Cape Bridgewater Wind Farm at 200m	63
Cape Bridgewater Wind Farm ambient	62
Beach at 25m from high water line	75
250m from coastal cliff face	69
8km inland from coast	57
Gas fired power station at 350m	74
Adelaide city at 70 and 200m from roads	76

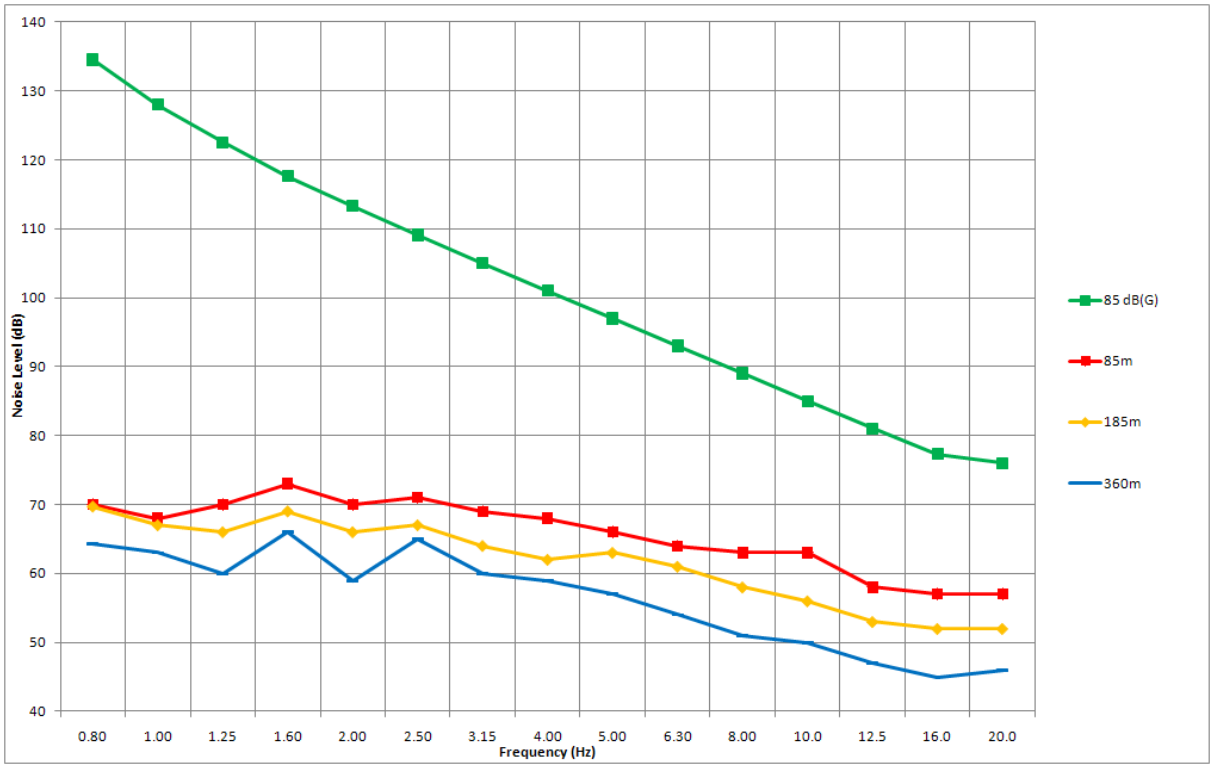

Figure 2 – Measured Levels of Infrasound at Clements Gap Wind Farm

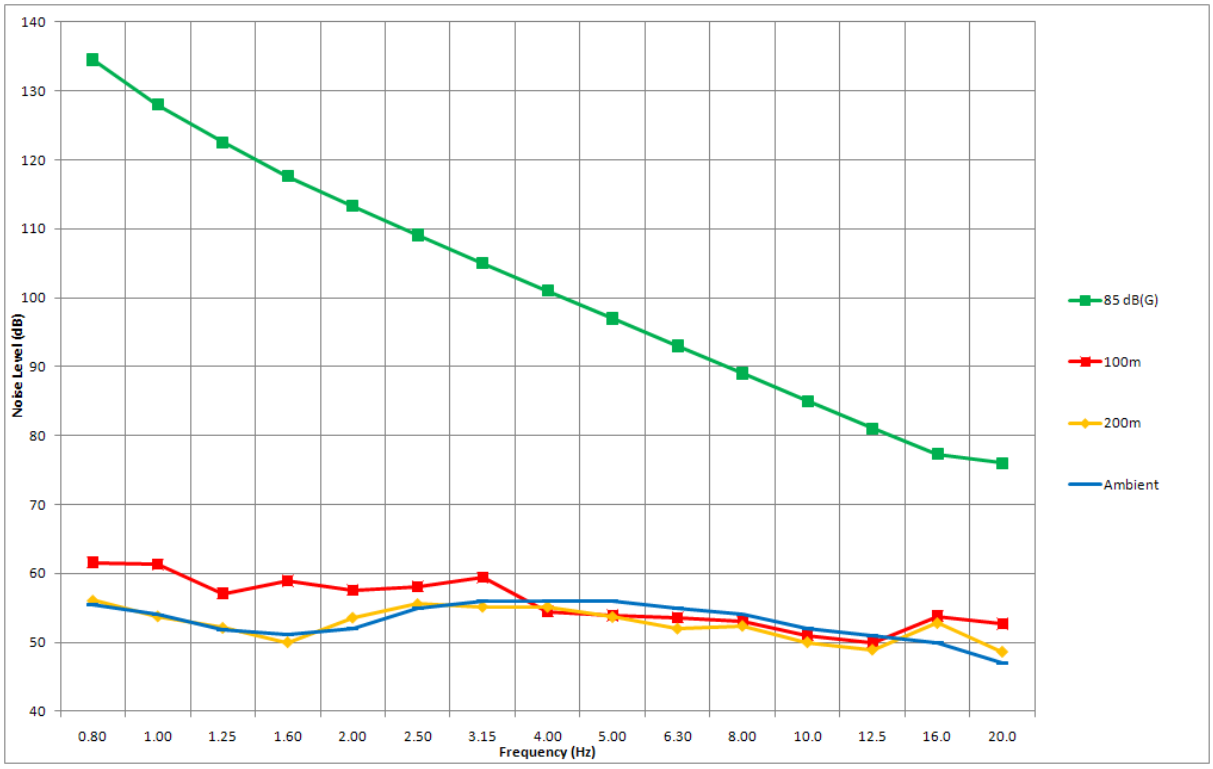

Figure 3 – Measured Levels of Infrasound at Cape Bridgewater Wind Farm

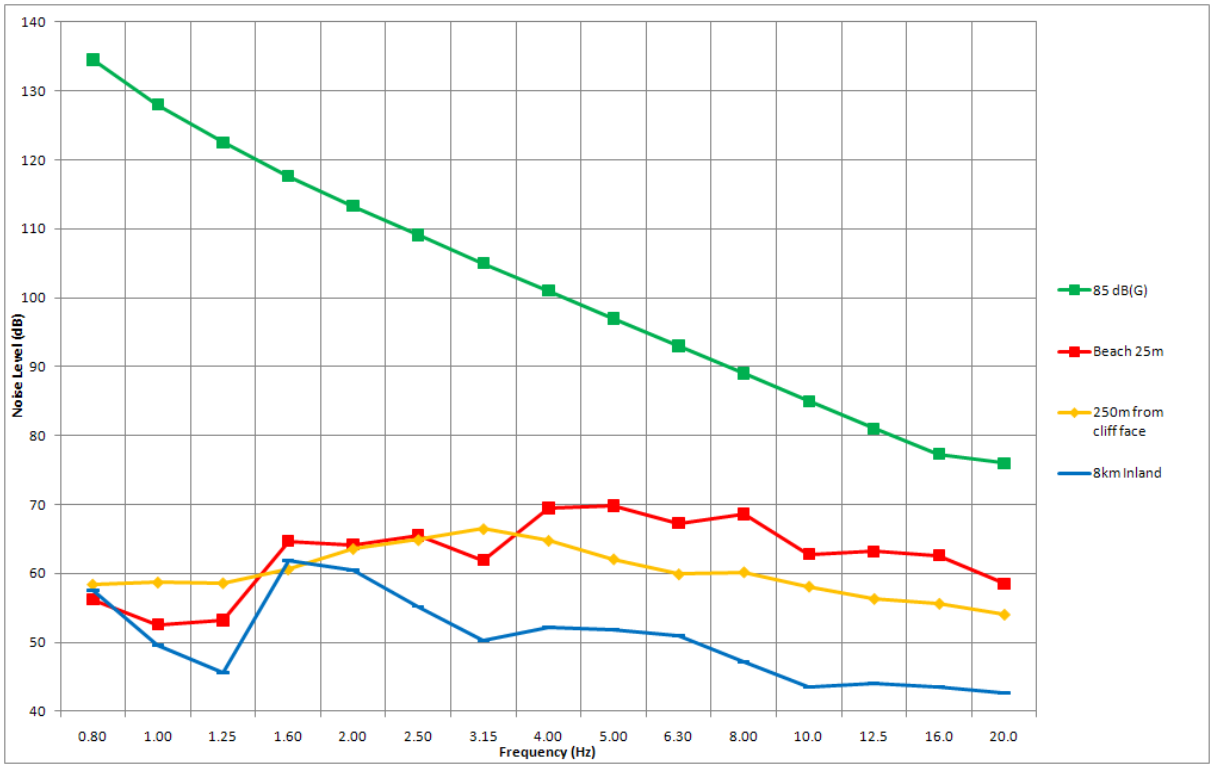

Figure 4 – Measured Levels of Infrasound from Natural Sources

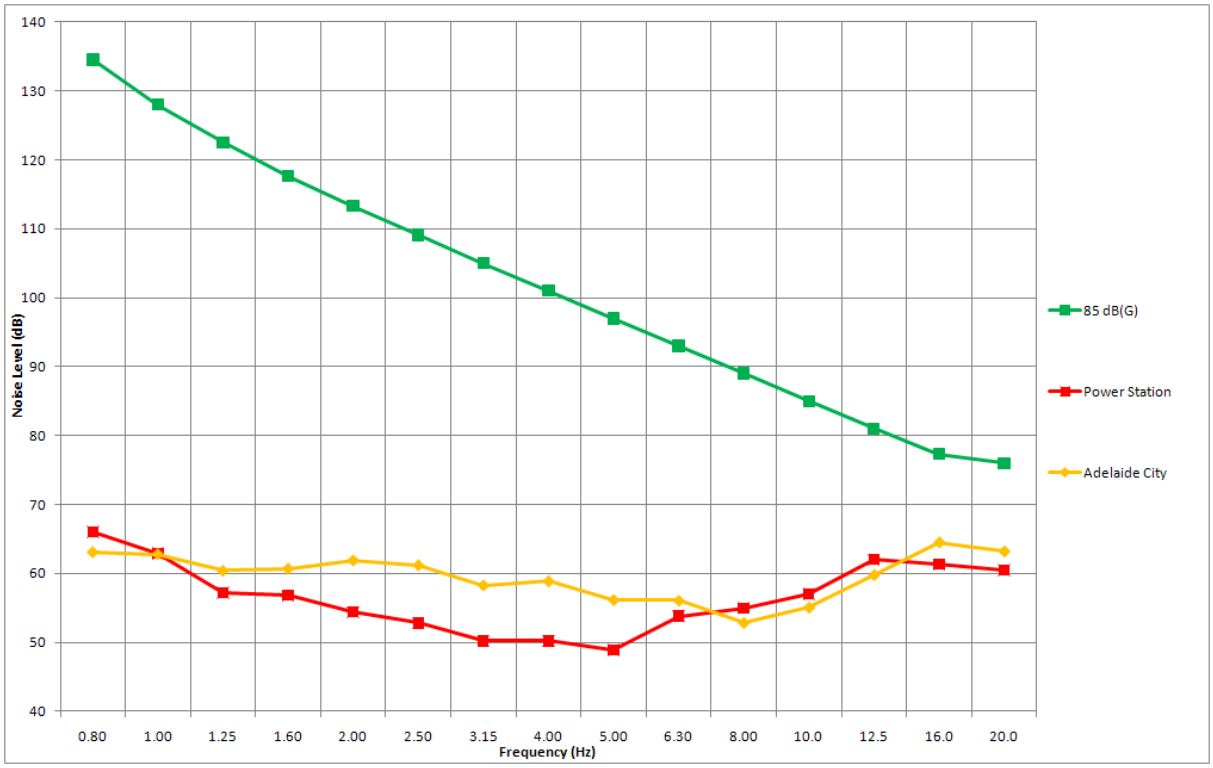

Figure 5 – Measured Levels of Infrasound from Man-made Sources

Discussion

At the Clements Gap Wind Farm, the level of attenuation with increasing distance from the turbine is consistent with the theoretical reduction of 6dB for each doubling of the distance due to “hemispherical spreading” of the sound wave. This observation confirms that the measured levels were predominantly produced by the turbine.

At the Cape Bridgewater Wind Farm, higher ambient noise levels (without the turbines rotating) were encountered than at the Clements Gap Wind Farm and therefore the same attenuation with increasing distance could not be observed. This indicates that the measured levels included a significant contribution of infrasound from the turbine at 100m but at a distance of 200m, the infrasound from other sources was at least as significant.

The levels of infrasound from waves at a beach (in light swell conditions) and in the vicinity of a coastal cliff were in the same order of magnitude as the infrasound measured close to turbines.

At 8km from the coast, the level of infrasound was significantly lower than in close proximity to the beach and the coastal cliff. This observation provides an explanation for the higher ambient levels of infrasound at the Cape Bridgewater Wind Farm.

The levels of infrasound in the city of Adelaide and in the vicinity of a gas fired power station were greater than the levels observed close to a wind turbine.

The measured levels of infrasound from the wind turbines and all other natural and man-made sources were well below the 85dB(G) threshold of audibility.

Conclusions

A method for measuring infrasound from wind turbines has been successfully demonstrated. The method shows that wind turbines generate infrasound and that close to wind turbines, the level of infrasound is well below the audibility threshold of 85 dB(G). An attenuation rate of 6dB per doubling of distance from a single turbine was also demonstrated.

The levels of infrasound produced by a wind turbine are similar to the levels produced by other man-made sources as well as natural sources along the coast.

The level of infrasound measured close to a wind turbine is prevalent in urban and coastal environments.

References

[1] O'Neal, R., Hellweg, R. D. Jr, Lampeter, R. M., 2009, "*A Study of Low Frequency Noise and Infrasound from Wind Turbines*", Epsilon Associates Inc, Maynard.

[2] Leventhall, G., 2003 "*A review of Published Research on Low Frequency Noise and its Effects*" Department for Environment, Food and Rural Affairs (DEFRA), May 2003

[3] ISO 7196:1995 "*Acoustics – Frequency weighting characteristics for infrasound measurements*"

[4] Hayes McKenzie Partnership., 2006. "*The Measurement of Low Frequency Noise at Three UK Wind Farms*", UK Department of Trade and Industry (DTI)

[5] DIN 45680 March 1997 "*Measurement and Assessment of Low-Frequency Noise Immision in the Neighbourhood*"

[6] Watanabe, T. and Moller, H.: *Low frequency hearing thresholds in pressure field and free field*. Jnl Low Freq. Noise Vibn 9, 106-115

[7] Hubbard, H. H., Shepherd, K. P., 1990, "*Wind Turbine Acoustics*", NASA

[8] Council of Standards Australia, 2010, "*AS 4959-2010 Acoustics – Measurement, prediction and assessment of noise from wind turbine generators*", Standards Australia, Sydney.

[9] South Australian Environment Protection Authority, 2003, "*Wind farms environmental noise guidelines*"

[10] South Australian Environment Protection Authority, 2009, "*Wind farms environmental noise guidelines*"

[11] Standards Council New Zealand, 1998, "*NZS 6808:1998 Acoustics – The Assessment and Measurement of Sound from Wind Turbine Generators*", Standards New Zealand, Wellington.

[12] Standards Council New Zealand, 2010, "*NZS 6808:2010 Acoustics – The Assessment and Measurement of Sound from Wind Turbine Generators*", Standards New Zealand, Wellington.

[13] IEC 61400-11:2002 "*Wind turbine generator systems – Part 11: Acoustic noise measurement techniques*" IEC 2002

[14] Betke, K., Schults von Glahn, M., Goos, O.: "*Messung der Infraschallabstrahlung von windkraftanlagen*" Proc DEWEK 1996, p 207-210 (In German)